




COUNTER TOP ELECTRIC BAKE & ROAST OVENS

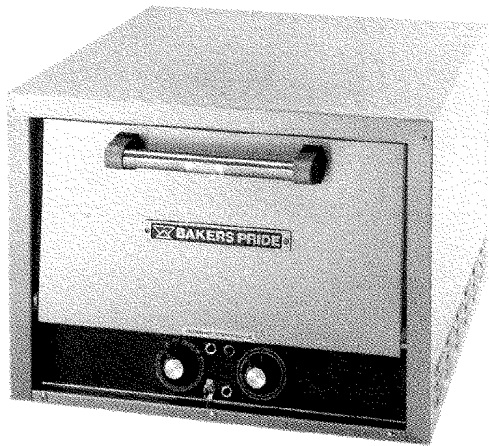

Model BK-18

SPECIFICATIONS

The BK-18 and P24S Bake & Roast electric counter top ovens provide a single bake chamber with a 7 1/2" (190mm) deck height, making them ideal for baking and roasting.

Controls feature a 60 minute electric timer with continuous ring alarm and manual shut-off, a 150°-550°F (65°-288°C) thermostat.

The exterior front, sides, top and door are fabricated of heavy gauge 430 stainless steel with a #4 finish. Door handle is constructed of tubular stainless steel. The BK-18 measures 23" wide (584mm) by 25" deep (635mm) by 17" tall (432mm) overall. The P24S measures 26" wide (660mm) by 28" deep (711mm) by 17" tall (432mm).

The interiors are constructed of high heat aluminized steel, welded to form a single unitized body. The entire oven is insulated with 1 1/2" thick (38mm) industrial grade insulation.

The BK-18 baking chamber measures 19 1/4" wide (489) by 18 3/4" deep (476mm) by 7 1/2" tall (190mm) overall, while the ceramic hearth baking deck measures 17 3/4" wide (451mm) by 17 1/2" deep (445mm).

The P24S baking chamber measures 22 1/4" wide (565mm) by 21 3/4" deep (552mm) by 7 1/2" tall (190mm) with a 20 3/4" (527mm) by 20 3/4" (527mm) ceramic hearth deck.

Incluy, tubular heating elements provide top and bottom heat with up to 1700 watts for the BK-18 in 120v or 208-240v and up to 2150 watts for the P24S in 208v or 220v-240v, single phase. 6' (1830mm) Cord and plug provided with standard voltages. International voltages available. Ovens are stackable. 1-Year limited parts & labor warranty included.

ELECTRIC DECK OVENS

- Model BK18
- Model P24S

STANDARD FEATURES


- BK-18 @ 1700 watts 120v or 208/240v
- P24S @ 2150 watts 208v or 220/240v
- 150°-550°F Temperature range (65°-288°C)
- Electric 60 minute timer with continuous ring alarm and manual shut-off
- Single cook/baking chamber
- Ceramic hearth bake deck
- 7 1/2" Deck height (190mm)
- All stainless steel exterior
- Unitized, welded, aluminized steel interior
- Fully insulated
- 6' Cord and plug (1830mm)
- Limited one year parts & labor warranty

OPTIONS & ACCESSORIES


- 4" (102 mm) adjustable legs
- Stainless steel stand with or without casters
- Stacking kit
- Wire rack for center shelf
- Steel deck
- Glass window for P24S
- International voltages
- BK-18 @ 1700 watts 120v or 208/240v
- P24S @ 2150 watts 208v or 220/240v

CERTIFICATIONS




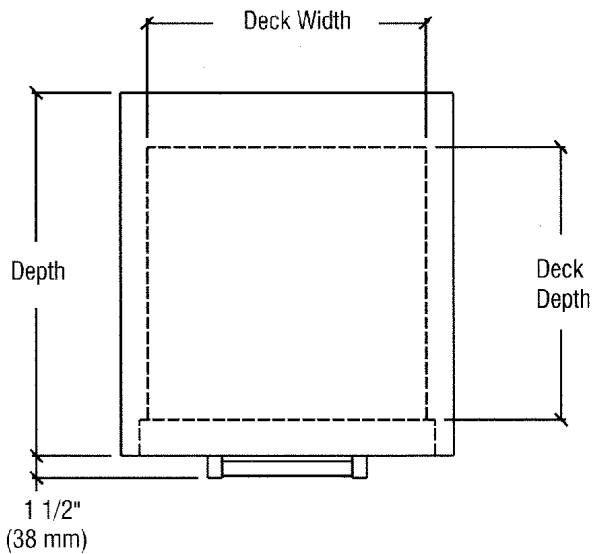


TOP VIEW

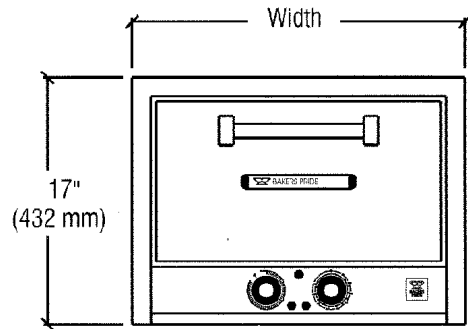

FRONT VIEW

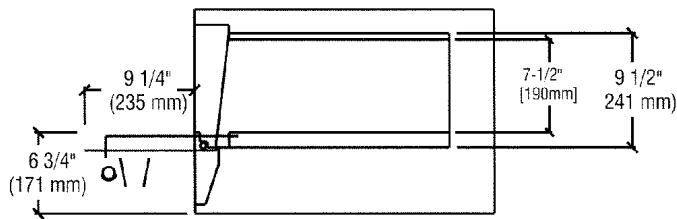

SIDE VIEW

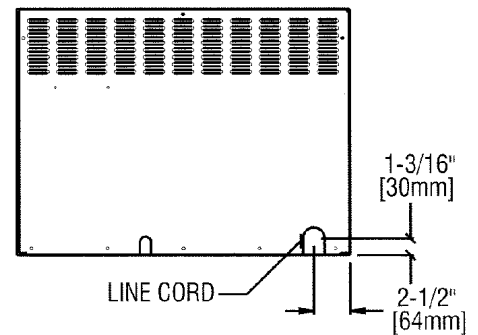

REAR VIEW

ALL DIMENSIONS NOMINAL

Model	Shipping Weight		Carton Dimensions				Crate Size			
	Lbs.	Kilos	Width Inches mm	Depth Inches mm	Height Inches mm	Cubic Feet	Cubic Meter			
BK-18	101	46	26	660	28	711	22	559	9.1	.26
P24S	145	66	28	711	30	762	22	559	10.7	.31

Under 500 lbs = Shipping Class # 70

Model	WATTS	VOLTAGE	PHASE	AMPS	NEMA Plug #			
					USA	Canada	UK	Europe
BK18	1700	120	1	14.2	5-15P	5-20P	---	---
BK18	1700	208-240	1	8.1	6-15P	6-15P	BS 1363A	CEE-VII
P24S	2150	208	1	10.3	6-15P	6-15P	---	---
P24S	2150	220-240	1	10.2	6-15P	6-15P	BS 1363A	CEE-VII

Each oven requires a separate electrical connection.

Model	Deck Size		# Decks	# Cook Chambers	Overall Dimensions					
	Inches	mm			Width Inches mm	Depth* Inches mm	Height* Inches mm			
BK-18	17 3/4	451	1	1	23	584	25	635	17	432
P24S	20 3/4	527	1	1	26	660	28	711	17	432

	Non-Combustible Construction*		Combustible Construction**	
	Inches	mm	Inches	mm
Left Side	3	76	3	76
Right Side	3	76	3	76
Rear	3	76	3	76

* In European Community Countries and North America, in NON-COMBUSTIBLE locations only.
 ** In European Community Countries only in COMBUSTIBLE locations. NUI for North America.

