



Delfield

4400 SERIES

Front-Breathing Flat Top Refrigerated Bases

Project _____

Item _____

Quantity _____

CSI Section 11400

FRONT-BREATHING FLAT TOP REFRIGERATED BASES

MODELS:

4472N Three section with doors

D4472N Three section with drawers



Model 4472N

STANDARD FEATURES

- All 4400 Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet or an existing line up
- "D" prefix models feature Delfield's exclusive new drawer system. Drawers are backed by a 10-year warranty on the track assembly
- Durable, rugged stainless steel sides, top and front
- Features Delfield's exclusive ABS interior. ABS is extremely durable - it won't dent, chip or corrode and is backed by a limited lifetime warranty
- Heavy duty self-closing hinges
- Environmentally friendly R404A refrigerant
- High density foamed in place polyurethane keeps energy costs low
- Black recessed quick grip handle
- Standard on 2" casters for easy cleaning and installation
- 7' cord and plug supplied

- One epoxy coated wire shelf, standard installed per door section
- One year parts and 90 day labor standard warranty. Additional warranties available, see below

OPTIONS AND ACCESSORIES

- 18" wide single tier overshelf
 - Stainless steel finish on back
 - Plastic laminate on front
 - Additional wire shelves
 - Door lock
 - *220V/50 Hertz electrical system
- *Inclusion of this option will alter electrical specifications of the unit.



SPECIFICATIONS

Exterior top is one-piece, 22-gauge stainless steel with integral 2.12" (5.1cm) square nosing at the front.

Exterior back and bottom is two-piece 24-gauge galvanized steel. Exterior ends are stainless steel.

Interior sides are thermoformed ABS plastic with shelf supports. Base is fully insulated with high-density foamed in place polyurethane.

Refrigeration system uses HFC-404A refrigerant. Compressor is 1/2 H.P., with condenser coil and condensate evaporator mounted on rear of the cabinet. Evaporator coils and temperature control are located on the interior rear wall of the cabinet. Refrigerant flow is controlled by a capillary tube. Cabinet maintains an interior cabinet temperature of 36°F to 40°F (2°C to 4°C).

Electrical connections are 115 volt, 60 Hertz, single phase. Unit has a 7' (2.1m) long electrical cord and NEMA 5-15P plug.

Casters: Equipment is mounted on 2" (5.08cm) diameter casters, with front three locking. Equipment clearance above the floor is 2.5" (6.35cm).

The following applies to three door models only
Doors have a 22-gauge stainless steel exterior, with thermoformed ABS plastic interior liner. Cabinet is supplied with one adjustable epoxy-coated wire shelf per door opening.

The following applies to six drawer models only
Drawer fronts have a 22-gauge stainless steel exterior, with thermoformed ABS plastic interior liner. Drawer frames are 12-gauge stainless steel. Drawer slides are 11-gauge

stainless steel with Delrin bearings. Each top drawer will hold one 12" x 20" (30.5cm x 50.8cm) and three 1/9 size pans 4"-6" (10.1cm-15.2cm) deep. Each bottom drawer holds one 12" x 20" (30.8cm x 50.8 cm) pan and three 1/2 size pans, 4" (10.6cm) deep. Pans are supplied by others.




980 S. Isabella Road
Mt. Pleasant, MI 48858
www.delfield.com

Phone: 800-733-8948
Fax: 800-669-0619
Email: info@delfield.com


Approval _____

Date _____


Front-Breathing FlatTop Refrigerated Bases

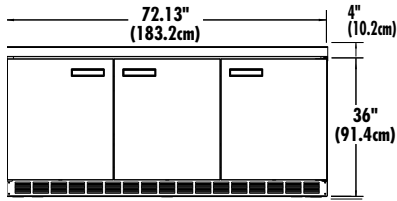


**ELEVATION VIEW
UC4472N**

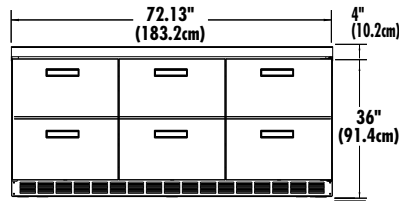


**ELEVATION VIEW
UCD4472N**




**END VIEW
UC4472N**



**END VIEW
UCD4472N**

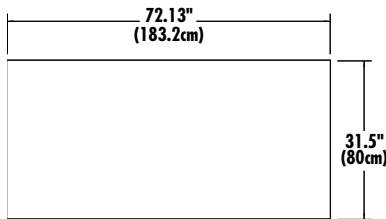

**PLAN VIEW
ALL MODELS**



**DOOR CLEARANCE
DETAIL**

Installation Note:
 Refrigeration system is designed so that air will flow under the unit, through the compressor area and out the front of the unit. Any restriction to this air flow path will void the warranties.

Mechanical Data—Standard Unit

MODEL NUMBER	#OF SHELVES	SHELF AREA. SQ. FT.	STORAGE CAP. CU. FT.	H.P.	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG	SHIP WEIGHT
4472N	2	8.22	18.7	1/2	115/60/1	12.0	5-15P	485 lbs/ 220 kg
D4472N	NA	NA	4	1/2	115/60/1	12.0	5-15P	545 lbs/ 247 kg